


5/2- and 5/3-way Solenoid Valves for process pneumatics



- 16,5 mm width/station
- Compact design
- Block mounting
- Fast response times


Type 8640

Valve island





Type 8644

Valve island

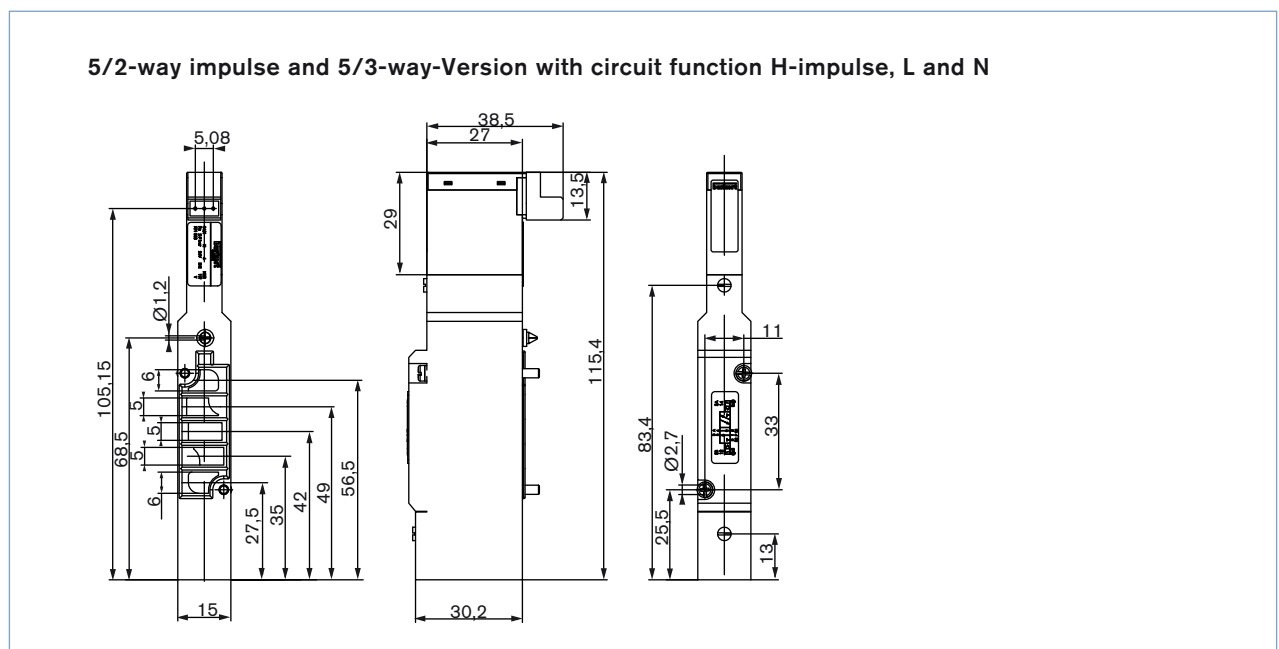
The solenoid valve Type 0461 consists of a servo controlled solenoid valve with a double coile and a pneumatic slide valve. The principle allows switching of high pressures together with low power consumption and fast response times. All valves are equipped with manual override as a standard.

Technical data	
Body material	Aluminium
Seal material	NBR
Medium	lubricated and non lubricated dry compressed air; neutral gases (10µm filter recommended)
Port connections	Flange
Pneumatic module	MP12
Supply port connection 1 (P), 3 (R), 5 (S)	G 3/8 NPT 3/8
Service port 2 (A), 4 (B)	G 1/8 NPT 1/8 Push-in connection Ø 8 mm
Power supply	24 V/DC
Electrical connection at the valve	Rectangular plug
Manual override	standard
Flow rate: Q _{Nn} value air [l/min]	Measured at +20°C, 6 bar pressure at valve inlet and 1 bar pressure difference
Pressure values [bar]	Measured as overpressure to the atmospheric pressure
Response times [ms]	Measured according to ISO 12238

Ordering chart for valves

Circuit function	Orifice [mm]	Q _{Nn} value air [l/min]:	Pressure range [bar]	Nominal power [W]	Response times		Item no.
					OPENING [ms]	Closing [ms]	
H  5/2-way valve, pilot-controlled, Impulse version	6	500	2,5-7,0	1	20	30	156 766
L  5/3-way-valve, pilot-controlled, in middle position all ports locked	6	500	2,5-7,0	1	15	50	156 767
N  5/3-way-valve, pilot-controlled, in middle position port 2 and 4 exhausted	6	500	2,5-7,0	1	15	50	156 768

Dimensions [mm]



To find your nearest Bürkert facility, click on the orange box


www.burkert.com

In case of special application conditions,
please consult for advice.

We reserve the right to make technical
changes without notice.

1210/0_EU-en_00895229